
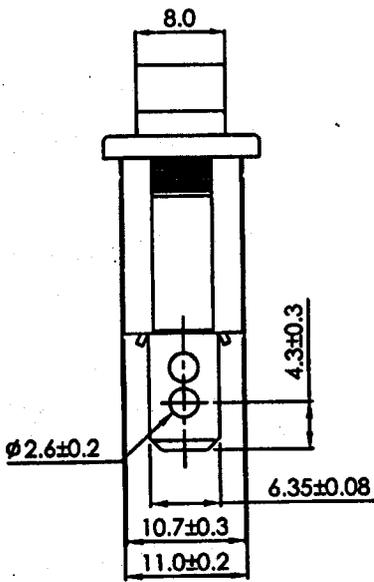
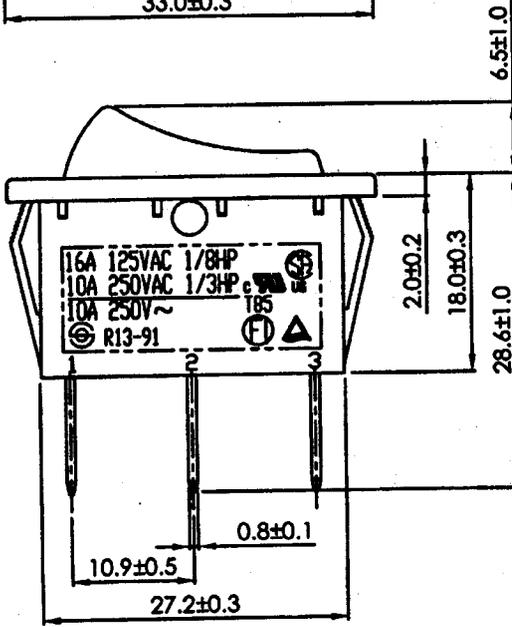


Rating	16A 125V AC 1/8HP 10A 250V AC 1/3HP cULus	Mounting Hole	Diagram	
	10A 250V ~ 185 (F) ⚠			
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-20°C~85°C	Panel Thickness	X	Y
Switch Function	3P SPST ON-OFF (Illuminated)	0.75...1.25	19.2-0.1	13+0.1
		1.25...2	19.4-0.1	13+0.1
		2...3	19.8-0.1	13+0.1

⚠ \*Material  
 Frame: Nylon#66, Black  
 Actuator: PC  
 Terminal: Copper alloy, Silver plated

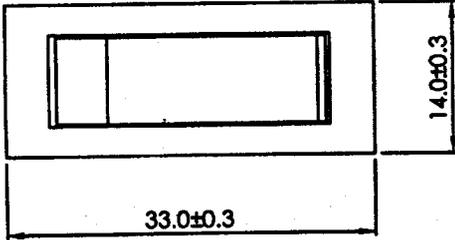

⚠

1821114	Green Clear
1820830	Orange Clear
1820821	Red Clear
SCI NO.	Lens Color

06/26/'07	邵勇	Add material description and update version	⚠
Date	Name	Description	NO
Drawn	Checked	Approved	SCI No.
邵勇	邵勇		SEE TABLE
06/26/'07	邵勇	邵勇	Model Name
			ROCKER SWITCH
			Model No.
			R13-91B-01
		Unit	mm
			SHIN CHIN INDUSTRIAL CO., LTD.