
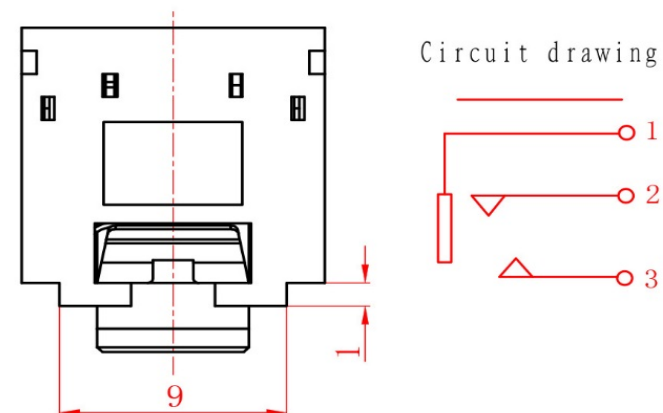
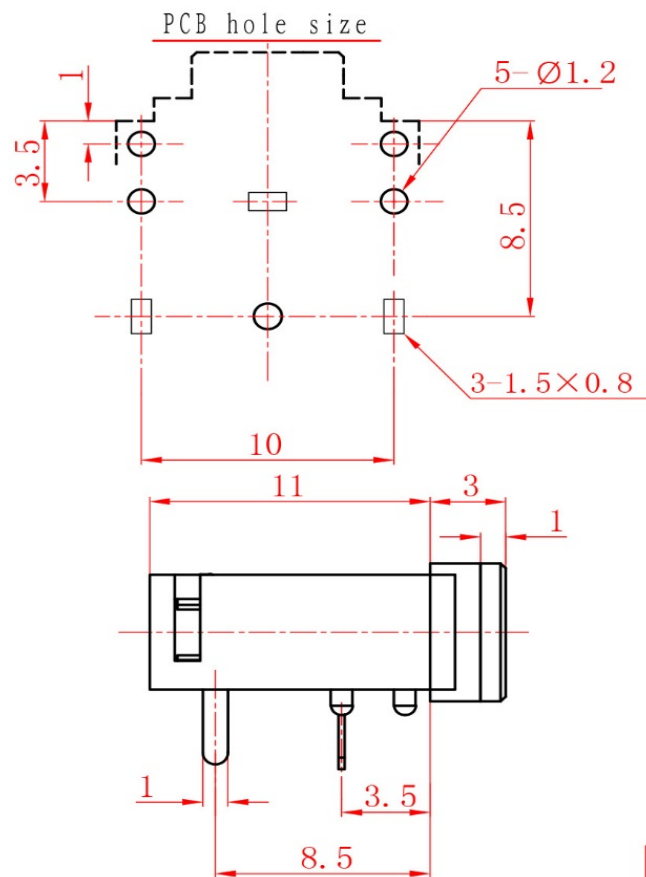


**3.5 mm socket, stereo, 90°
for PCB mounting**

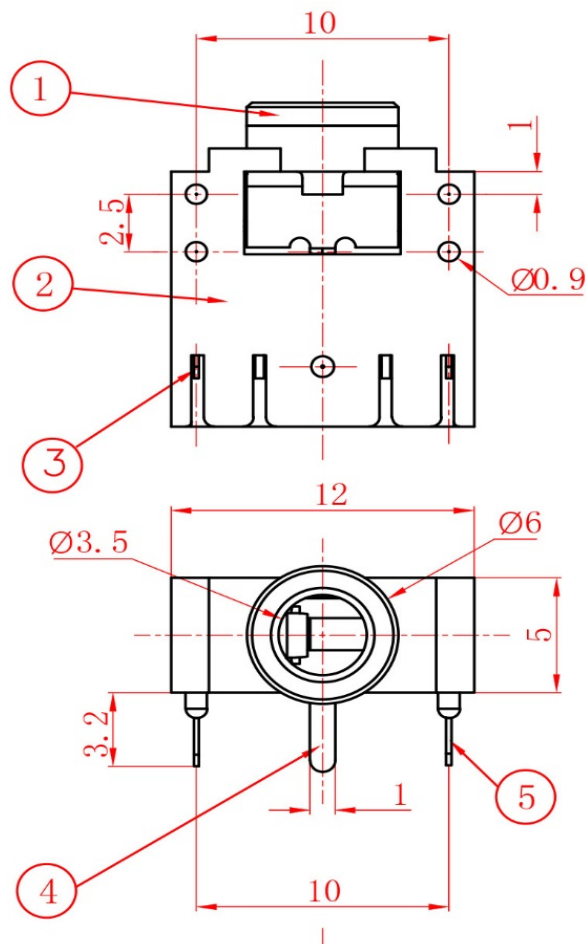

SPECIFICATION

1. Rating : $-30\sim 70^{\circ}\text{C}$, DC 30V 0.5A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500V AC (50Hz)/min;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

5	5# Spring	1	Mn-steel	D.L1Ag
4	1# Spring	1	Tin-bronze	D.L1Ag
3	2# Spring	1	Mn-steel	D.L1Ag
2	Chassis	1	ABS	Black
1	Shaft sleeve	1	BRASS $\varnothing=6\text{mm}$ H=1mm	D. Ni
NO.	Name		Material	Note

All material in accordance with RoHS and Reach!